


229.00 EUR
 incl. 19% VAT, plus [shipping](#)

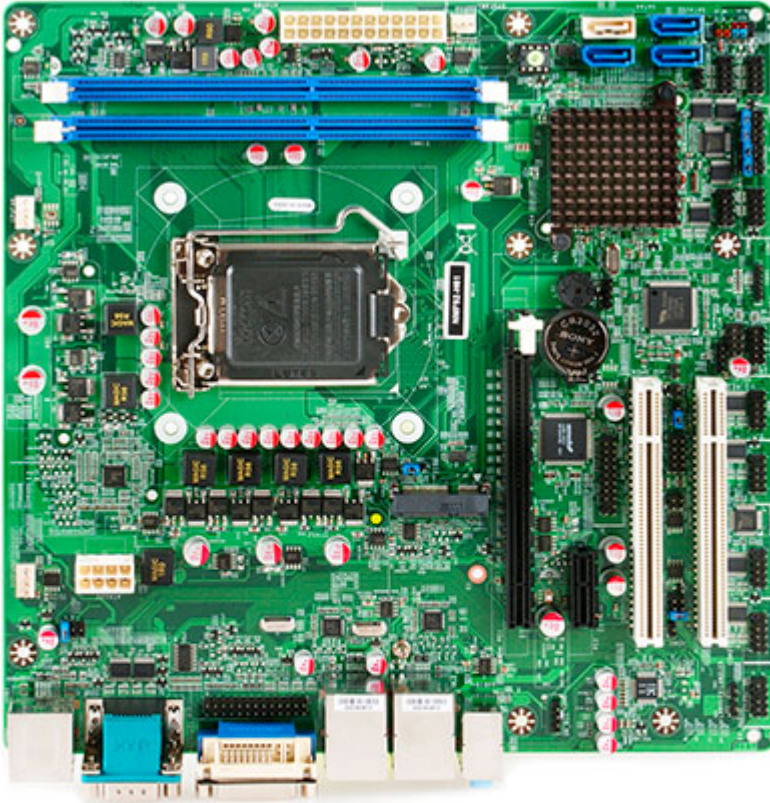

- INTEL® H61 Chipset
- Support INTEL® LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- Support 2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
- Support TPM 1.2 function
- 1 * Mini PCI-E slot (Selectable W/mSATA)
- 4 * SATA2 connectors (SATA4 share with mSATA)
- HDMI, DVI-D and VGA Video Outputs
- Support 10 * COM ports (COM3 for RS232/422/485)
- Support CPU Smart FAN
- Supports 2 * Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Micro ATX form factor

CPU	• INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
Chipset	• INTEL® H61 Chipset
Memory	• 2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
Expansion Slots	• 1 * PCIe x 16, 2 * PCI, 1 * PCIe x 1 • 1 * MINI PCI-E (Selectable with mSATA)
Storage	• 4 * Serial ATA2 3Gb/s connectors (SATA4 share with mSATA) • 1 * mSATA (Selectable with Mini PCI-E)

• Audio	• Realtek ALC662 6-Channel HD Audio CODEC
• Ethernet LAN	• Realtek RTL8111E PCI-E Gigabit Ethernet LAN *2
• USB	• Embedded 9 * USB 2.0/1.1
• Special Features	• Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog
• Rear Panel I / O	• 6 * USB 2.0/1.1 ports • 2 * RJ-45 ports • 2 * COM ports • 1 * VGA port • 1 * DVI-D port • 1 * HDMI port • 3 * Audio Phone Jack
• Internal I / O	• 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports • CPU /NB / Chassis Fan connectors • 1 * PS2/KB header • 1 * GPIO header • 8 * COM header (COM3 for RS232/422/485) • 1 * TPM 1.2 header • 1 * Parallel header • 1 * Chassis Intrusion header • 1 * AUDIO header • 1 * 24-pin & 8-pin 12V ATX Power connector
• BIOS	• AMI EFI 32MB SMT Flash ROM
• Form Factor	• Micro ATX Form Factor (244mm x 244mm)
• Functional	• ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
• Certificate	• CE, FCC, RoHS
• Temperature	• Operating within 0~60 centigrade • Storage within -20-85 centigrade